SPON

CLOUD WALL MOUNT AMPLIFIER

Installation Manual

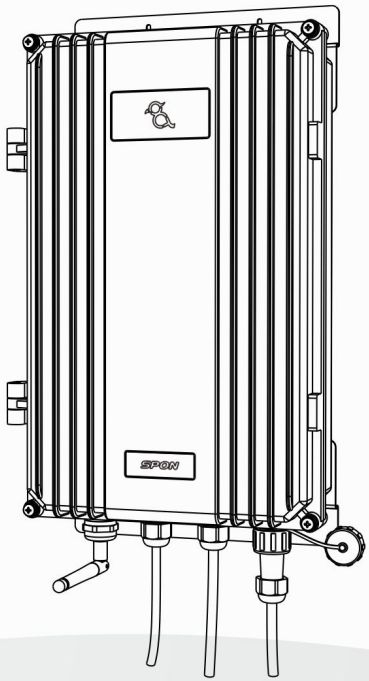

IP NETWORK PUBLIC ADDRESS SYSTEM

Interface Description

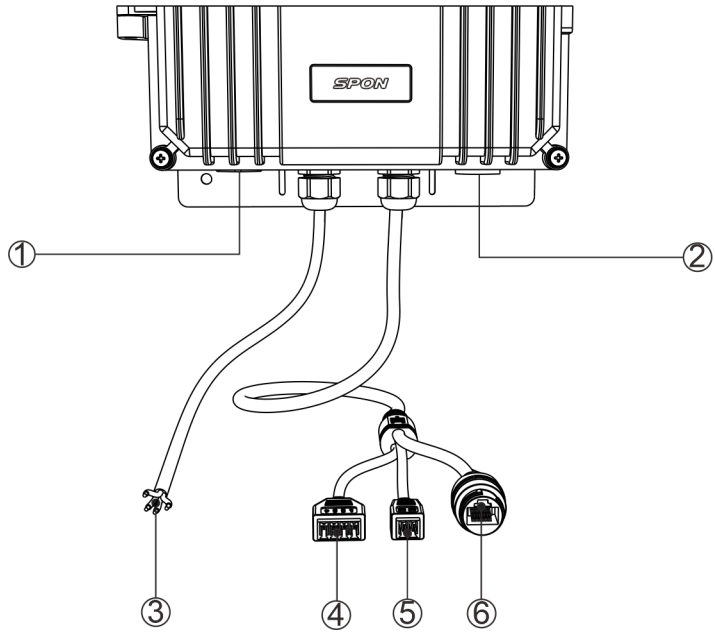

①Antenna interface

②Power input interface

③Power output interface

④Line in interface

⑤Alarm in interface

⑥RJ45 network interface

⑦Power input interface:AC220 power input.

Wiring

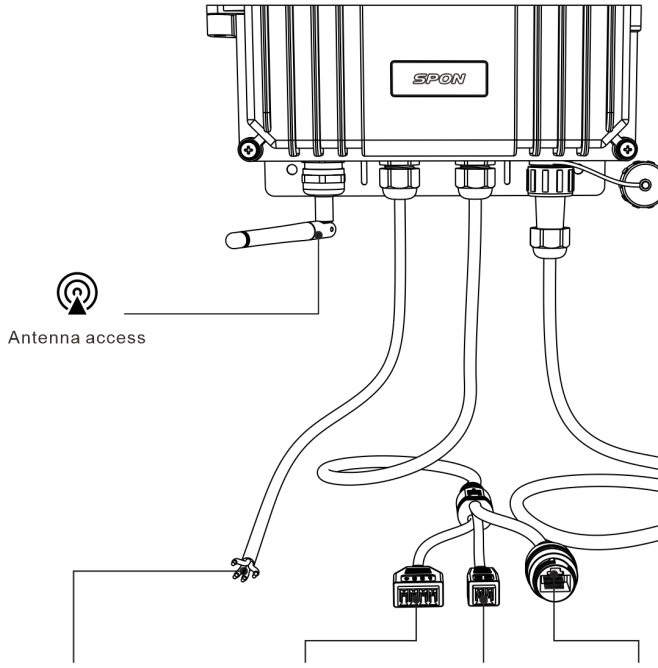

2 channels power output
(30W 8Ω constant resistance speaker)

Line in
(Support multi
audio sources)

Alarm in

Network
Access

Power input
(AC 220V)

Installation Diagram

Cement wall installation：

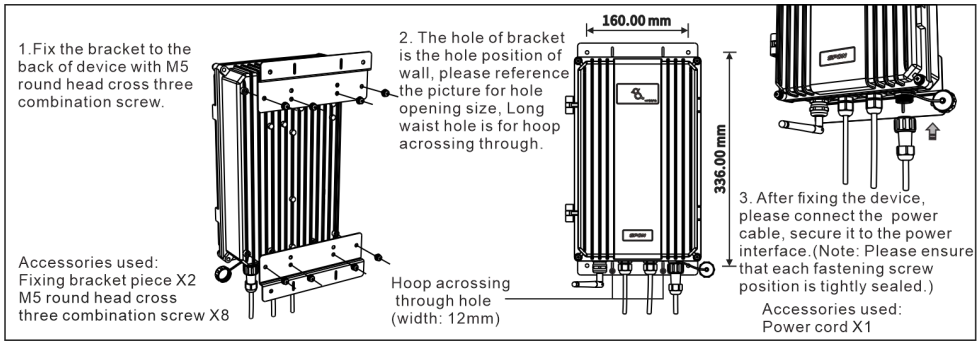

Specifications, Functional Unit and Parameters

Power	AC 220V 1A@50Hz
Output Power	2*30W@8Ω
Input sensitivity	0dBV
Frequency response	20~20kHz
THD (total harmonic distortion)	≤0.5%（1kHz，@0dBV）
Audio sampling rate	48kHz
SNR(Signal to Noise Ratio)	≥82dB
Ethernet	10M/100M Adaptive
Trigger input method	Short-Circuit
Operating temperature, Operating humidity	-30°C~+55C，≤90%RH（nodew）
Dimension	322*215*102mm（L*W*H）

Packing List

Round head cross three combination screw 8pcs (M5(304))

Terminal block 1pcs(3.81-2P)

Terminal block 1pcs(3.81-4P)

Fixing bracket piece 1pcs

Waterproof tail line connector 1pcs

Power cord 1pcs

Installation manual 1pcs

Certification 1pcs

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice

V1. 0B231025