SPON

DIGITAL CONFERENCE SYSTEM
DELEGATE UNIT
Installation Manual

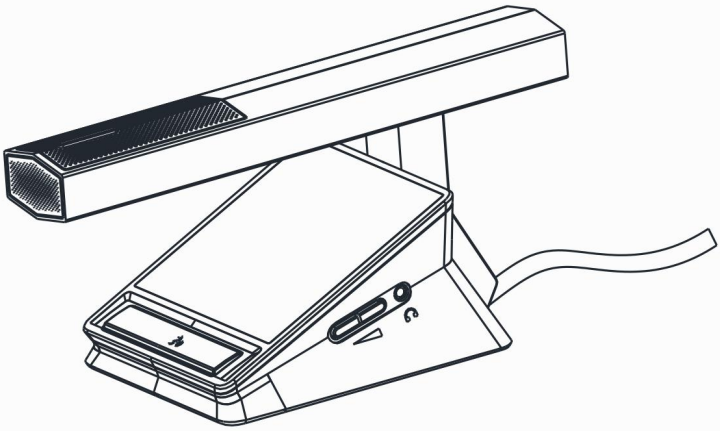

IP NETWORK INTERCOM SYSTEM

Interface Description

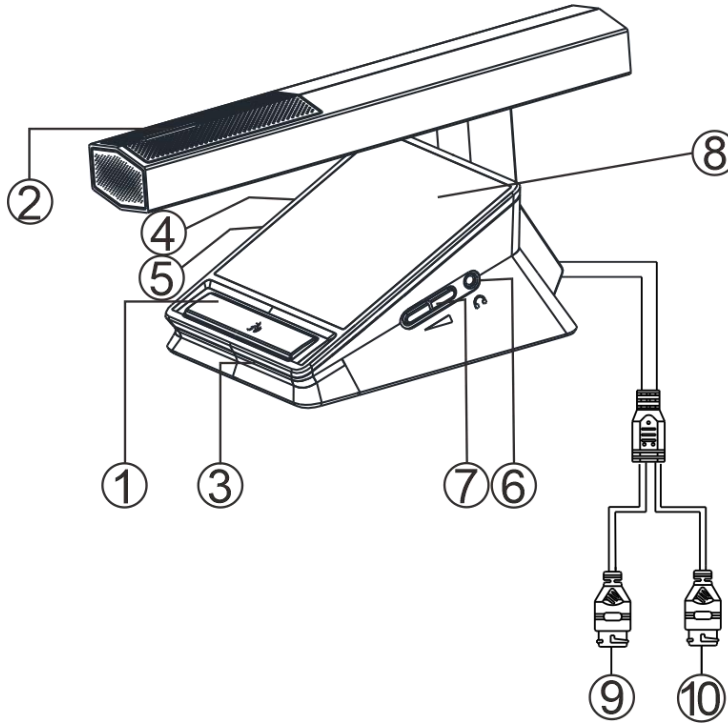

①Speak button

②Microphone pole status light

③Speak status light

④Looped network status light

⑤Type-C interface

⑥3.5 audio interface

⑦Volume button+、-

⑧Touch screen

⑨White network port: connect to the OUT port of spliter.

⑩White network port: connect to the RANG port of spliter.

Wiring

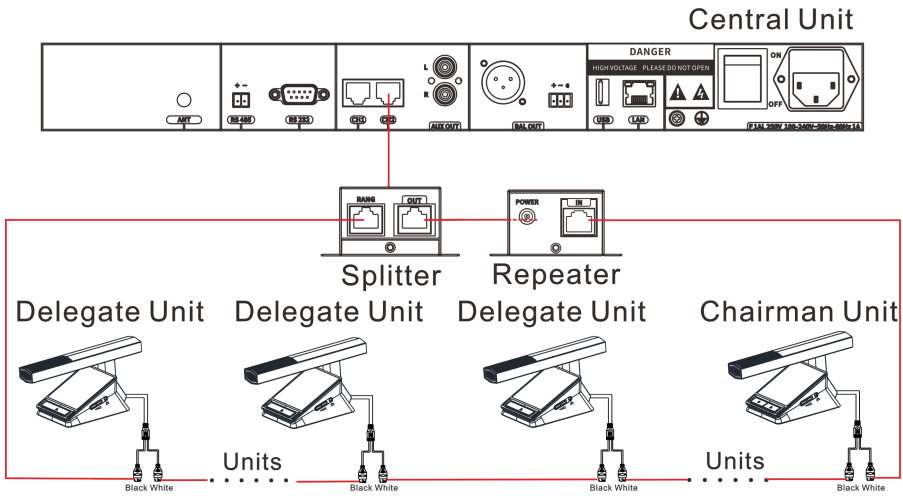

Appearance Installation Dimension Diagram (unit :mm)

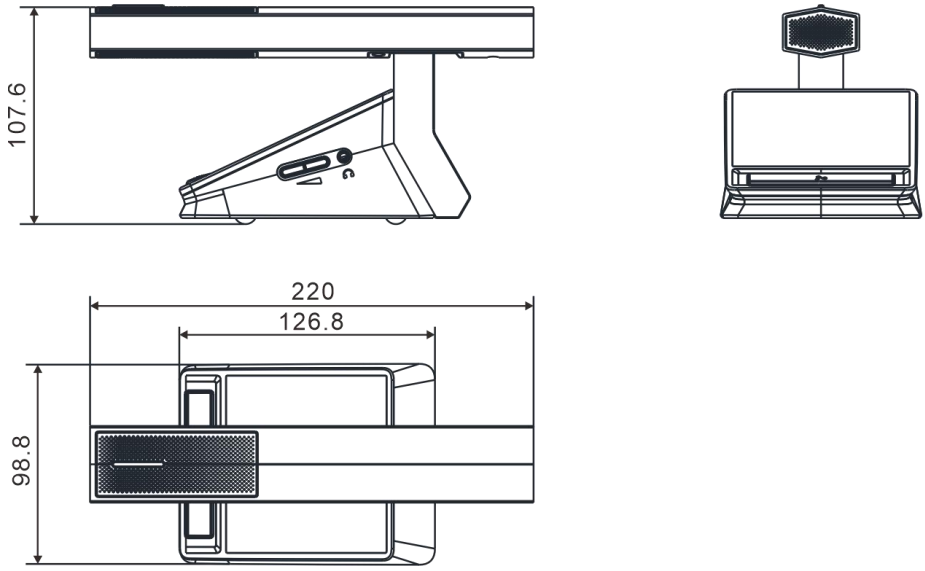

Specifications, Functional Components and Parameters

Power supply, Power consumption	Central unit supply 24V power input Delegate unit power consumption≤3.5W
Audio coding format	MP3/PCM/ADPCM
Audio sampling rate, Bit rate	8Khz-48Khz,16bit,8Kbps-320kbps
(SNR)Signal to noise ratio, Frequency response	≥83dB、40Hz-18KHz
Server file broadcast (SNR)signal to noise ratio, frequency response	≥90dB、40Hz-18KHz
Screen	4.3 inch Capacitive touch screen
Screen Resolution	480*480(RGB)
Headphone output interface	ø 3.5mm Stereo jack
Storage	Built-in SPI FLASH
Connection method	Cat6a network cable
Microphone	14mm diameter gold-plated capacitive microphone *1
Directional property	Supercardioid
Interface	RJ45 network port*2, connect to the next microphone unit
Operating temperature, Operating humidity	0-45℃，≤90％（non condensing）
Dimension	220×98.8×107.6mm
Shell material	ABS/Aluminium Alloy

Packing List

Standard network cable1pcs(1m)

Installation manual 1pcs

Certification 1pcs

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice

Wechat

V1. 2B240412