




NAC-301C

Wall Speaker


Composite speaker diaphragm, with clear and melodious sound quality, easy and quick installation, composite suspension edge and damping treatment, longer lifespan

- Constant Impedance
- Clear Voice

CIRCUIT DIAGRAM

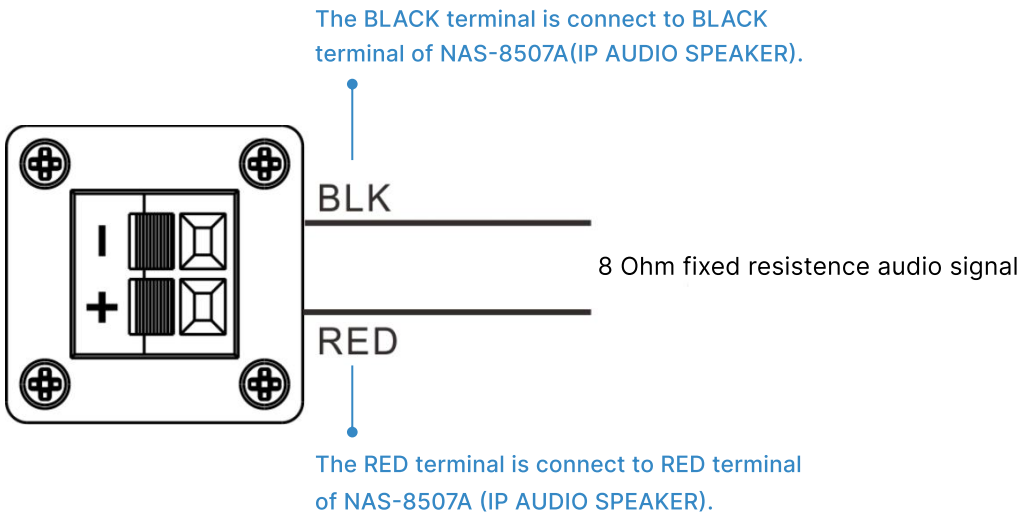

DIMENSIONAL DRAWING

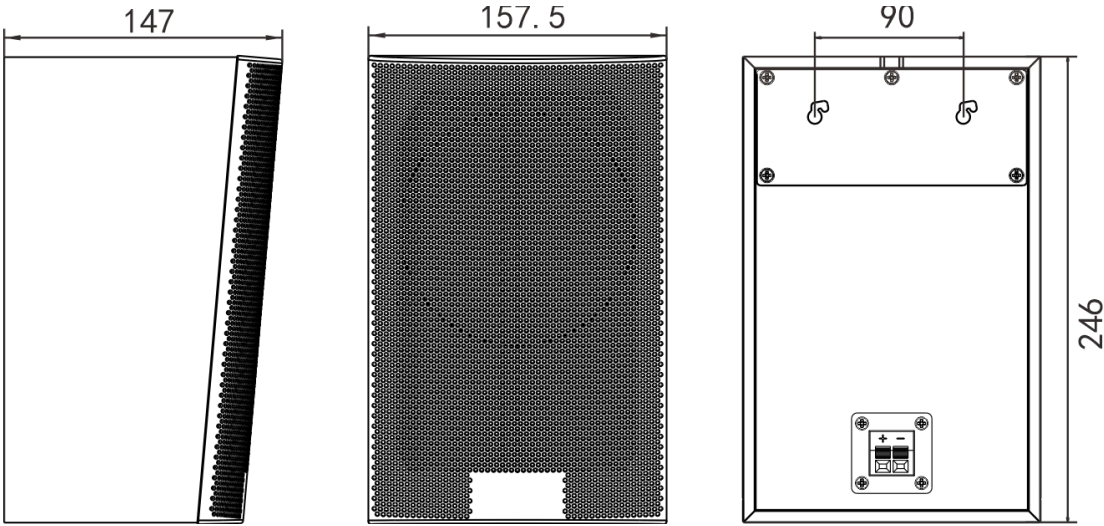

01

SPECIFICATION

POWER PARAMETERS

Rated Power:	15W
Max Power:	20W
Input Impedance:	8 Ohm

SPEAKER PARAMETERS

Sensitivity:	87dB±3dB
Frequency Response:	200Hz-20KHz
Speaker Unit:	1×5 Inch Paper Cone Full Range Speaker

MECHANICAL & ENVIRONMENT PROPERTIES

Mounting Method:	Wall-Mounted
Installation Environment:	Dry Indoor Locations
Product Color:	White
Body Material:	Wooden
Product Dimensions:	246*157*147mm
Product Weight:	1.5KG
Warranty:	2 Years


ACCESSORIES

1×Installation Manual
1×Certification Card
3×Plastic Expansion Set
3×Cup Head Self-Tapping Screw(M4*35)
1 × Bracket

APPLICATION

I Application 1

The 15Watt 8ohm Wall Mount Speaker NAC-301C can be connected with IP Wall Mount Speaker NAS-8507A for receive broadcasting or announcement from Audio Management Software or IP paging Console.

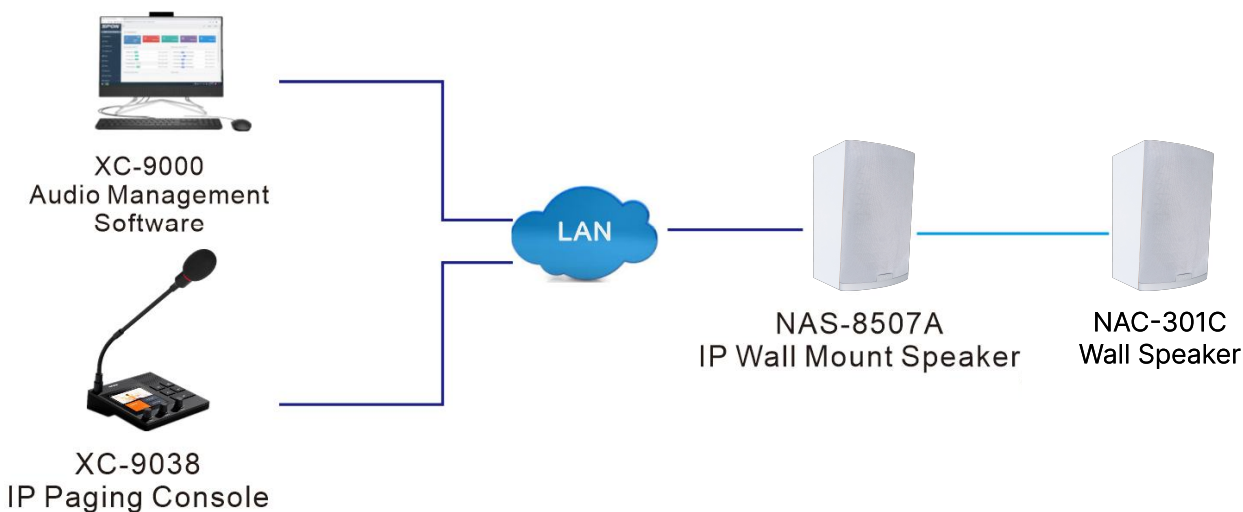

02

INSTALLATION INSTRUCTIONS

STEP 1

M4 screw Bracket Plastic expansion set wall

Use 2 plastic expansion sleeves and 2 M4 screws to install the bracket horizontally.

STEP 2

IP network active speaker wall

Align the two mounting holes on the back of the device with the two rivets of the bracket insert it from the large opening of the mounting hole, and then move it up and right to iam and buckle the device on the rivets of the bracket on the wall.

