



SOUND PICK-UP SYSTEM PLATFORM

Installation Manual



Operating Environment

- ◆ CPU: above Intel I3 series processor
- ◆ Memory: 4G or above.
- ◆ Hard disk: 500G hard disk or above
- ◆ Network card: 100M/1000M self-adaption
- ◆ Sound card: the computer request for it and it must with stereo mixing function.


Server Installation

(1) Run the server software installation package as an administrator, enter to the installation interface, click on "Next", the installation path can be customized, others choose default choices. After the installation is completed, a shortcut icon will be generated on the desktop, as shown in the following figure. **(Note: Do not include Chinese in the installation path, otherwise it may cause an error)**



(2) Right click on the shortcut icon, choose "Properties" - "Compatibility", and select "Run as Administrator".

(3) Double click on the "Audio Intelligent Analysis Platform Software Console" icon to enter to the server console.

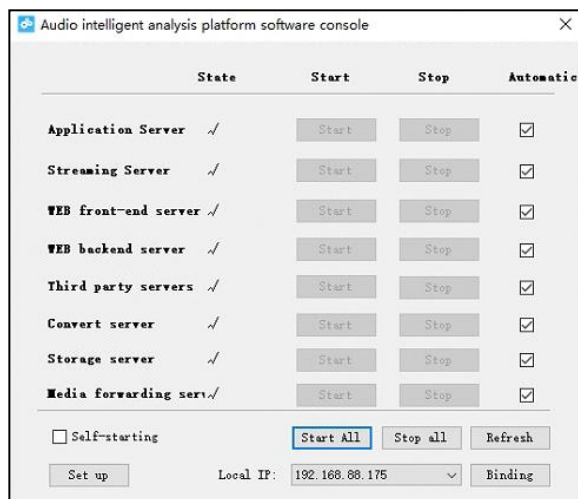

Start server: After starting the console, please check whether the IP address of "Local IP" column is correct (if there are multiple network adapters, bind one network adapter to the audio intelligent analysis platform), and then check whether all servers are started.

Restart server: Click on the "Stop all" button first , then press the "Start all" button.

Note:

1)The normal status of the server is displayed as √. If × is displayed, please press the "Stop All" button to stop all servers, and then click on the "Set up" button to check whether the server port is occupied.

2)If "Unable to... Because XXX.dll cannot be found" is displayed when the server is started, please check the environment variables. The operation mode is to right click on "This computer", select "Properties" - "Advanced System Settings" - "Environment Variables" - "System variables", and check as follows:

Variable Name: GST_PLUGIN_PATH

Variable Value: C:\TS-900A\StreamingMediaServer\lib\gststreamer-1.0\plugins

Variable Name: GSTREAMER_1_0_ROOT_X86_64


Variable Value: C:\TS-900A\StreamingMediaServer

Variable Name: Path need to contain the value C:\TS-900A\StreamingMediaServer\bin

Note: The variable name is fixed and cannot be modified. The path in the variable value is an example. The actual situation should be changed according to the path of the platform installation.

(4)Access server IP address through web, for example: <http://192.168.88.175:9080> (default port is 9080, configure it in the "Set up", if there is no special needs no need to modify it), the default username and password are both **admin**.

(5)Enter to the firewall configuration interface of the computer and disable all firewalls to ensure that the device will not be blocked by the firewall.

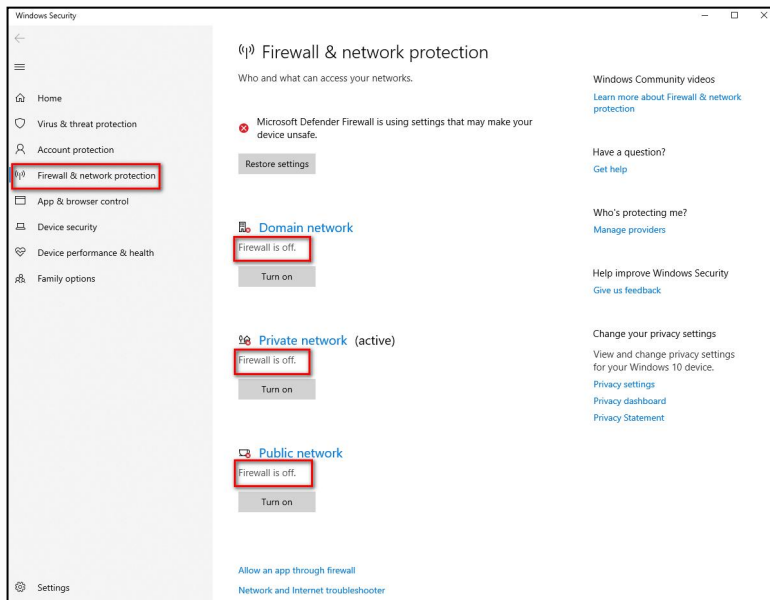

Wechat

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice

